


100 A, 600 VAC/250 VDC, 50† – 400 hertz
150 A, 600 VAC/250 VDC, 50† – 400 hertz

Ordering Information:

						
Receptacle Assembly			Receptacle		Mating Plug	Mating Connector
			Receptacle Housings Only		Cable Dia.	
Description	Hub Size (In.)	Spring Door Cat. #	Spring Door Cat. #	Threaded Cap Only Cat. #	Cat. #	Cat. #
100A - Style 1						
2-wire, } 2-pole }	1¼ 1½	AREA10214 AREA10215	AR1021	AR1027	0.875 to 1.70	APJ10277 APR10257
3-wire, } 3-pole }	1¼ 1½	AREA10314 AREA10315	AR1031	AR1037	0.875 to 1.70	APJ10377 APR10357
4-wire, } 4-pole }	1½ 2	AREA10415 AREA10416	AR1041	AR1047	0.875 to 1.70	APJ10477 APR10457
100 A - Style 2						
2-wire, } 3-pole }	1¼ 1½	AREA10324 AREA10325	AR1032	AR1038	0.875 to 1.70	APJ10387 APR10367
3-wire, } 4-pole }	1½ 2	AREA10425 AREA10426	AR1042	AR1048	0.875 to 1.70	APJ10487 APR10467
150 A - Style 2 *			AR1542	AR1548	0.875 to 1.70	APJ15487
3-wire, } 4-pole }						

Dimensions (In Inches):

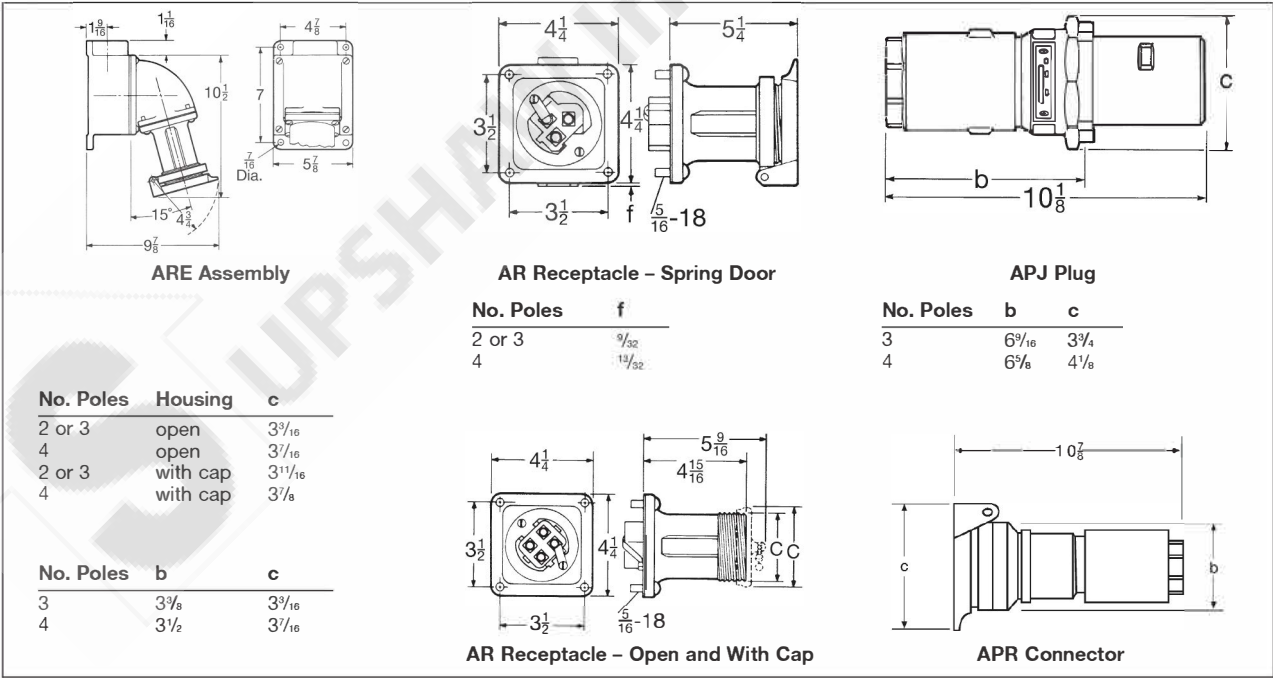

† For use on systems less than 60 hertz the receptacles, plugs and connectors are for disconnect use only.
* For 150A - Consult factory for additional options and configurations. Consult factory for certifications information.